
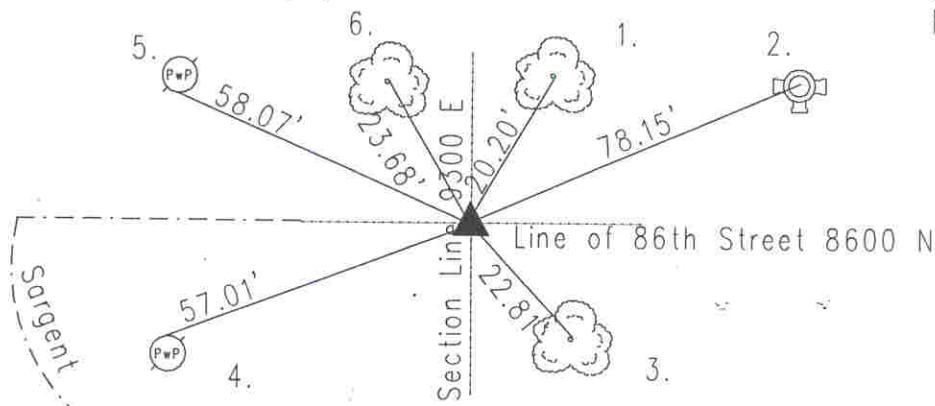


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 19 TOWNSHIP 17 RANGE 5
DATE: 7-23-01
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 1-2-97

IN. S.P.C. E ZONE NAD '83
NAME: 17051902
N: 517861.7600(m)
E: 71113.5760(m)

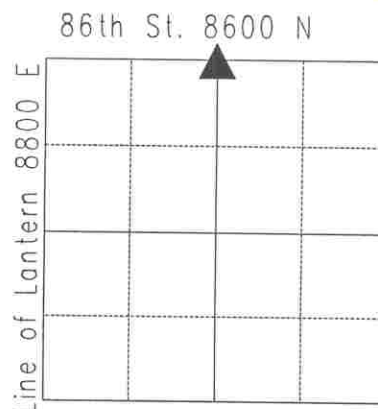

Original post set 1821 by Laughlin with witnesses: 10" beech S 31 W 27 links, 10" beech N 57 E 13 links per Marion County Atlas pg. 16. Legal by Wilson 8-1854 per Lawrence Township Legal Survey Book pg. 8 & 9 called stone. But no witness given. Distance given across entire N 19-17-5. Stone NW, NE & N. Legal 5-1916 through 3-17 by Mason per Lawrence Township Legal pg. 65 called corner 'I'. Dug ...no stone found. Stone found SW, E 1/2 of SW 18-17-5 and SE 18-17-5 distances given. Traverse of N line 19-17-5 run 10-1982. Rebar fd NQQ of NW and pipe fd at NQQ NE 19-17-5. Measured distance checked from rebar to NE 19-17-5 within 1/2 foot on 1917 Legal. Corners appeared same on Legl 1854 per Lawrence pg.8. Sec. 18 & 19, 1983 called stone fd at SQ of SEQ Sec. 18. Stone was 8" below road surface. Corner per 1854 survey as 'F'; bearing trees also indicated. SQ set by doubling distances. Harrison set. Re-tied 5-17-90. Retied 1-2-97. Re-tied 7-23-01.

17051902

REF.	DISTANCE	DESCRIPTION
1.	20.20'	PK nail w/shiner SE 30" ash 12"up
2.	78.15'	Top nut of fire hydrant
3.	22.81'	PK Nail w/shiner E 12" ash 15"up
4.	57.01'	PK nail N PwP#23-221AB 12"up
5.	58.07'	PK nail S PwP#47-221AA 24"up
6.	23.68'	PK nail w/shiner NE ash 15"up